





Greek shaped plates type "loft"

SECTION CHARACTERISTICS					
THICKNESS in mm					
	0,6	0,7	0,8	1,0	1,25
W (Kg/m ²)	7,8	9,1	10,5	13,1	16,3
J (cm ² /m)	38,8	47,2	55,8	73,7	96,3
W (cm ² /m)	11,3	13,9	16,8	23	31,3

DIMENSIONAL CHARACTERISTICS	
Width:	+ 10 mm up to 3.000 mm + 20 mm over 3.000 mm + 5 mm for all lengths
Length:	± 5 mm
Square off	5 ≤ 0,5% of width

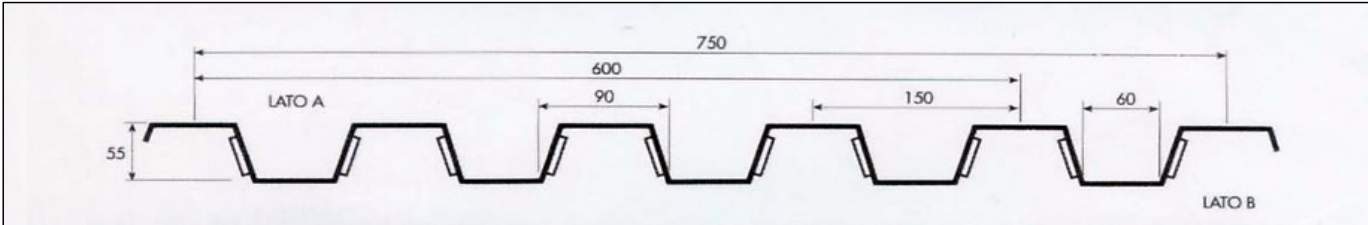

MAXIMUM CHARGE UNIFORMLY DISTRIBUTED IN Kg/m² LG 55/600

WHEELBASE in m																		
THICKNESS in mm		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,00	3,25	3,50	3,75	4,00	4,25	4,50	4,75	5,00
	0,6	1433	914	633	463	352	266	192	183	108	83	65	51	41	33	26	21	17
							277	223	142	152	128	110	94	82	72	63	56	50
	0,7	1776	1133	784	573	436	324	233	173	131	101	79	62	49	40	32	25	20
							343	276	226	188	159	136	117	102	89	78	69	61
	0,8	2142	1367	946	693	528	385	278	206	157	121	95	75	60	49	39	32	26
							415	334	275	229	194	166	143	124	109	96	85	76
	1,0	2929	1871	1295	948	730	509	368	273	208	161	126	101	81	65	53	43	36
						723	569	459	377	315	266	228	197	172	151	133	116	106
	1,25	3990	2548	1765	1293	955	666	482	358	272	211	166	132	106	86	70	57	47
						986	776	626	515	430	364	312	270	253	207	183	163	145
	0,6	1794	1145	793	580	442	348	280	230	185	144	114	91	73	60	49	41	34
										192	163	139	120	105	92	81	72	64
	0,7	2224	1420	984	721	550	433	349	287	227	177	140	112	91	75	62	51	43
										240	203	174	151	120	105	102	91	81
	0,8	2680	1711	1185	868	662	521	420	346	268	208	165	132	107	88	72	60	50
									351	289	245	210	181	158	139	123	109	98
	1,0	3685	2341	1622	1189	907	714	576	464	354	276	219	176	143	117	97	80	67
									474	397	336	288	249	218	192	170	151	135
	1,25	4991	3189	2210	1620	1237	974	786	607	464	362	287	230	187	153	127	106	88
									647	541	459	394	341	298	262	232	207	185